


How to set the Modem Init String?

- 1) Login administrator
- 2) Go to the “Options”
- 3) Choose the “Fax Modem List”
- 4) View the “Fax Line”
- 5) Click the “Advance Setting”
- 6) Replace the sentence (**AT& S0=0**) with init string on the Suggested Modem Init Strings Table
- 7) Press “Submit” to save the setting

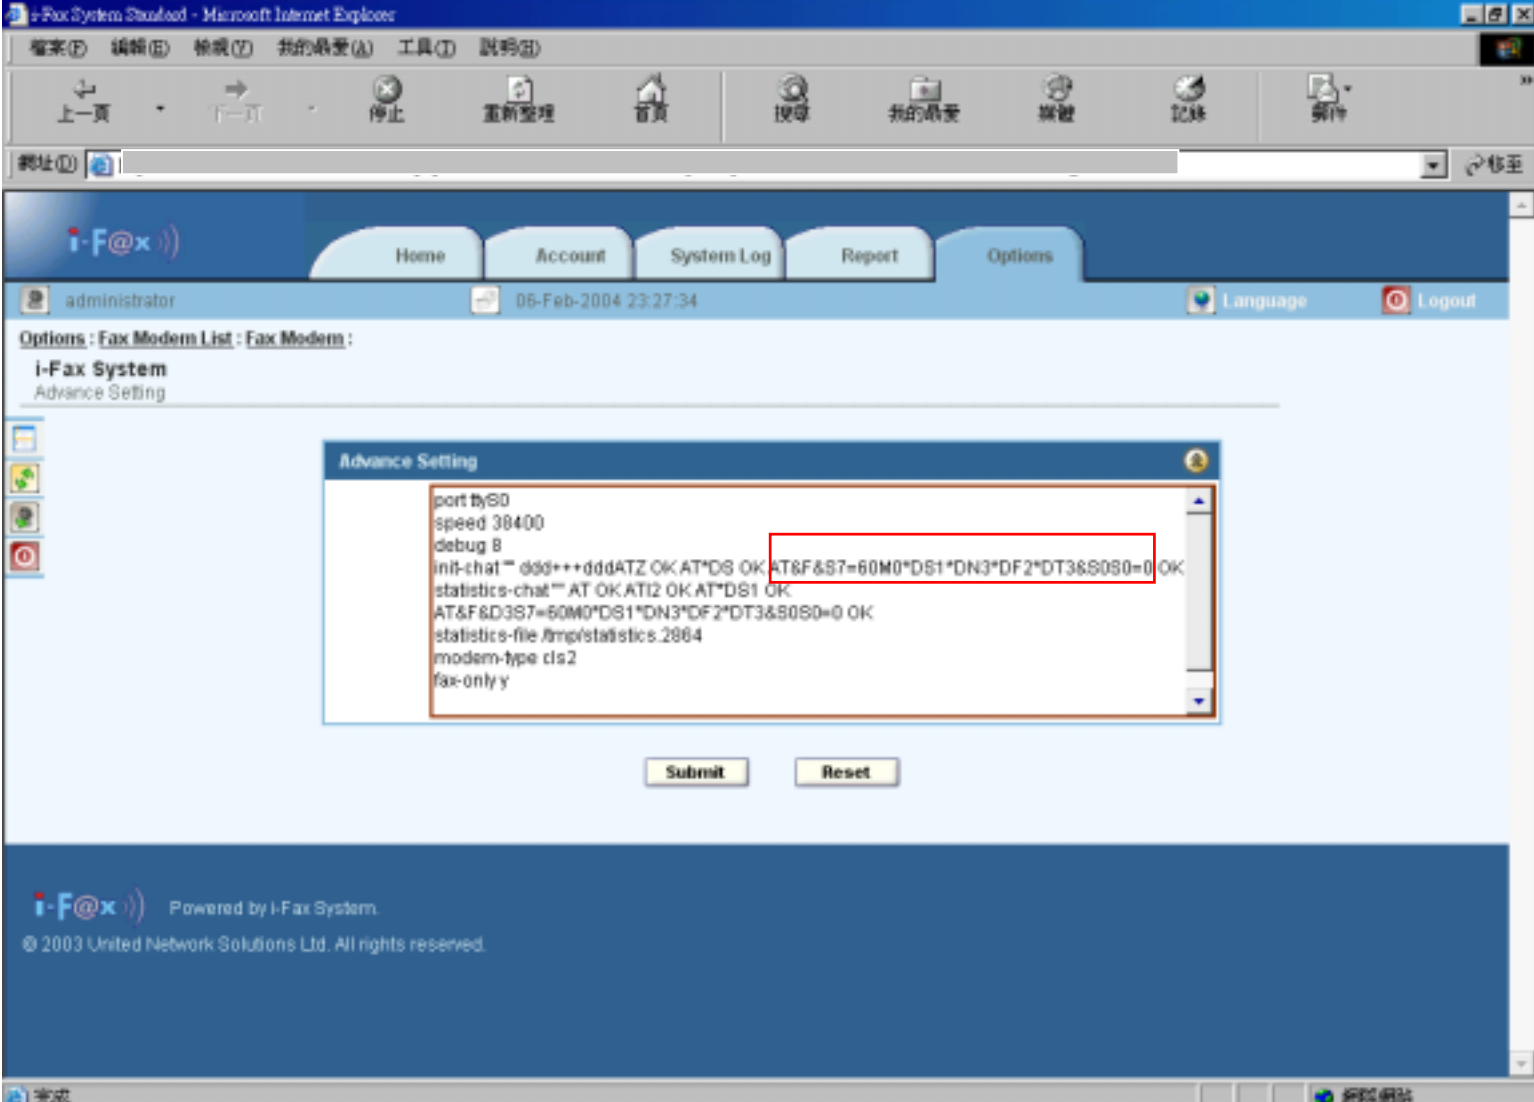

The screenshot shows the i-Fax System web interface in Microsoft Internet Explorer. The user is logged in as 'administrator' on '06-Feb-2004 23:27:34'. The 'Options' menu is selected, and the 'Fax Modem List' is set to 'Fax Modem'. The 'i-Fax System Advance Setting' dialog box is open, displaying the following text:

```
port ttyS0
speed 38400
debug 8
init-chat "" ddd+++dddATZ OK AT*DS OK AT&F&S7=60M0*DS1*DN3*DF2*DT3&S0S0=0 OK
statistics-chat "" AT OK,AT12 OK,AT*DS1 OK
AT&F&D3S7=60M0*DS1*DN3*DF2*DT3&S0S0=0 OK
statistics-file /tmp/statistics.2864
modem-type clt2
fax-only y
```

The line **AT&F&S7=60M0*DS1*DN3*DF2*DT3&S0S0=0 OK** is highlighted with a red box. Below the dialog box are 'Submit' and 'Reset' buttons. The footer of the page reads: 'i-Fax System Powered by I-Fax System. © 2003 United Network Solutions Ltd. All rights reserved.'